



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

10815 U.S. PRO
09/591995
06/12/00

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99111521.3

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

06/04/00

This Page Blank (uspto)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.: **99111521.3**
Demande n°:

Anmeldetag:
Date of filing: **14/06/99**
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Sony International (Europe) GmbH
50829 Köln
GERMANY

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Channel decoder for a digital broadcast receiver

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
H04N7/24, H04N5/00

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: **AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE**
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

13 Page Blank (uspto)

MÜLLER & HOFFMANN PATENTANWÄLTE

European Patent Attorneys - European Trademark Attorneys

Innere Wiener Strasse 17
D - 81667 München

Attorney's File: 51716 Mü/Ko/sat

14.06.1999

Client's Ref.: S99P5050EP00/PAE98-110ERDS

Sony International (Europe) GmbH

Hugo-Eckener-Str. 20
D-50829 Köln

EPO - Munich
52

14. Juni 1999

CHANNEL DECODER FOR A DIGITAL BROADCAST RECEIVER

MÜLLER & HOFFMANN

- 2 -

Sony International (Europe) GmbH

File: 51.716

EPO - Munich
52**Description**

14. Juni 1999

- 1 The present invention relates to a channel decoder for a digital broadcast receiver, in particular to the use of the packet synchronization status available within such a channel decoder, i. e. within the synchronization byte detector included in such a channel decoder. In this sense the packet synchronization
5 status indicates the lock-in of the receiver to one broadcast channel.

The typical hardware structure of a channel decoder within a digital video broadcast receiver adapted to the satellite reception is shown in Fig. 3. The IF-signal generated by the tuner of the digital broadcast receiver is supplied to a
10 baseband conversion circuit 8 that receives at a second input thereof a control signal supplied by a control circuit 9. The demodulated signal is then supplied to the channel decoder before it passes a baseband physical interface 10 that outputs a transport stream of data.

- 15 In the shown example of satellite reception, the channel decoder includes as a first stage a baseband filtering & clock/carrier recovery circuit 2 which supplies a feedback signal to the control circuit 9. The baseband filtering & clock/carrier recovery circuit 2 includes a not shown clock and carrier recovery loop comprising clock/carrier phase detectors which is usually built by a PLL circuit to gain the clock and carrier of the transmitted signal. The resulting demodulated and baseband filtered IF-signal gets decoded in a Viterbi-decoder 5
20 which outputs a bitstream of the decoded bits of the transmission signal. This bitstream undergoes an error correction by a forward error correction (FEC) which is built by a de-interleaver 3 followed by a Reed-Solomon decoder 6 and
25 an energy dispersal removal circuit 7 before being output to the baseband physical interface 10.

The de-interleaver 3, the RS-decoder 6 and the energy dispersal removal circuit 7 need synchronization signals that indicate transport stream packets as
30 well as an 8-packet-structure for the energy dispersal removal. The synchronization signals are generated by a sync-byte-detector 1 which detects the regular repeated transmission of the synchronization byte (0x47 in the MPEG transport packet structure) or it is inverted (0xb8 in the MPEG transport packet structure) every 1632 bits (204 bytes).

35

MÜLLER & HOFFMANN

- 3 -

Sony International (Europe) GmbH

File: 51.716

- 1 Depending whether such a receiver is used for transmission signals transmitted via satellite, via cable or via a terrestrial broadcasting an additional signal processing might be necessary within the processing stages of the receiver described above. The basic differences of channel decoders
5 adapted to the different kinds of broadcasting are described hereinafter in connection with an embodiment according to the present invention.

Also, the channel decoder of DAB receiver is in its main parts identical to the channel decoder described above and shown in Fig. 3, i.e. it also comprises a
10 clock/carrier recovery circuit, a sync-byte-detector and a FEC-stage.

It is the object underlying the present invention to provide an improved channel decoder for a digital broadcast receiver.

- 15 This object is solved with a channel decoder for a digital broadcast receiver according to the present invention which comprises a synchronization byte detector 1 and which is characterized in that said synchronization byte detector 1 provides an output signal indicating the lock-in of the receiver to one broadcast channel which is used as a feed forward and/or feedback signal to respectively switch processing stages succeeding and/or preceding said synchronization
20 byte detector 1 into a different mode dependent on whether or not lock has been achieved.

- Preferable embodiments of the present invention are defined in dependent
25 claims 2 to 8, respectively.

The use of the lock detected signal not only for purposes within the sync-byte-detector, but also to provide it within the whole channel decoder or even provide it to the whole broadcast receiver to switch processing stages into different
30 modes, e. g. to switch-off all stages following the synchronization byte detector in the signal flow in case of an unlocked state, leads to less power consumption of the receiver and to less CPU resources needed within the receiver, since the dynamic assignment of CPU resources dependent on the synchronization status becomes possible.

35

According to the prior art the error correction stage operates in worst case condition if an incoming packet is not correctable, i. e. if the receiver is in un-

MÜLLER & HOFFMANN

- 4 -

Sony International (Europe) GmbH

File: 51.716

1 locked state, and therewith exhibits a high power consumption and needs a
high amount of CPU resources. Therefore, especially the switching of process-
ing stages preceding and succeeding the synchronization byte detector depend-
ent on whether or not lock has been achieved according to the present inven-
5 tion enables the shifting of processing power from the error correction stages
succeeding the synchronization byte detector to the clock and/or carrier recovery
during acquisition of a broadcast channel and vice versa if the receiver is
properly locked to a broadcast channel. With this measure processing power is
saved during acquisition of a broadcast channel, since the forward error
10 correction and preferably all further following processing stages get switched-
off in case the receiver is not locked to a certain broadcast channel.

Furtheron, if the loop bandwidth of the clock and carrier recovery loop built
within the baseband filtering & clock/carrier recovery circuit gets switched de-
15 pendent on whether or not lock has been achieved the baseband filtering &
clock/carrier recovery circuit needs less calculation power after the receiver is
locked, since only a narrow bandwidth has to be processed in this case.

It is also possible to switch the loop bandwidth of other loops preceding the
20 sync-byte detector 1, e. g. of a loop that adjusts the tuning frequency of the re-
ceiver.

For these reasons, the present invention inherits the advantage that a smaller
CPU can be built into a digital broadcast receiver which comprises a channel
25 decoder according to the present invention, since after the lock-in to a broad-
cast channel the spare processing power of the baseband filtering & clock/car-
rier recovery circuit and/or any other circuit that is preceding the sync-byte-
detector can be shifted to the forward error correction stage and the process-
ing stages following thereafter. Vice versa, if the broadcast receiver adapted
30 according to the present invention is not locked to a broadcast channel a high
processing power can be assigned to the baseband filtering & clock/carrier re-
covery circuit and/or any other circuit that is preceding the sync-byte-detec-
tor, since the forward error correction stage and the processing stages follow-
ing thereafter need no processing power at all.

35

Still furtheron, the digital broadcast receiver according to the present
invention achieves a better reconstruction of the transmitted data, since the
clock and/or carrier phase detectors used within the baseband filtering &

MÜLLER & HOFFMANN

- 5 -

Sony International (Europe) GmbH

File: 51.716

- 1 clock/carrier recovery circuit can be switched to implementations that work
only in locked mode, but in this case better than the robust implementations
used for acquisition, dependent on the synchronization status of the channel
decoder, i. e. the sync-byte-detector. Such a switching is also thinkable for
5 other circuits within the broadcast receiver.

The present invention is in particular applicable to digital video broadcast
receivers and in particular to such for cable transmission, but it can also be
used for satellite or terrestrial transmission and/or for digital audio broadcast
10 reception according to any transmission standard. Basically, it can be imple-
mented in any channel decoder.

An exemplary embodiment of the present invention will be described in
connection with the accompanying figures in which
15

- Fig. 1** shows a block diagram of a channel decoder according to a preferred
embodiment of the present invention;
Fig. 2 shows the basic differences inbetween receivers for the satellite, the
cable and the terrestrial broadcast system.
20 **Fig. 3** shows a block diagram of the signal processing within a digital video
broadcast receiver according to the prior art, in particular within its
channel decoder.

From a signal flow point of view the channel decoder according to the present
25 invention shown in Fig. 1 basically works in the same way as the channel de-
coder described in connection with Fig. 3. According to the present invention
the sync-byte-detector 1 included within the channel decoder according to the
present invention additionally generates a lock detected output signal which
indicates the lock-in to a specific broadcast channel. This lock detected output
30 signal is supplied to at least one of the clock/carrier recovery circuit 2, the de-
interleaver 3, the RS-decoder 6, the energy dispersal removal circuit 7 and an
additional output port 4 of the channel decoder.

As described above, on basis of the lock-detected output signal of the sync-
35 byte-detector 1 the clock/carrier recovery circuit 2 is able to switch the loop
bandwidth of its clock and/or carrier recovery loop and/or to switch the clock
carrier phase detectors to implementations that work only in locked mode, but
in this case better than the robust implementation used for acquisition.

1 Furtheron, the de-interleaver 3, the Reed-Solomon-decoder 6 and the energy
dispersal removal circuit 7 receive the lock detected output signal of the sync-
byte-detector 1 at a respective enable input so that they can be switched-on if
lock has been achieved and switched-off in unlocked state.

5 Furtheron, the lock detected output signal of the sync-byte-detector 1 is
supplied to an additional output port 4 of the channel decoder so that also
other processing stages within the digital broadcast receiver can be switched
into different modes for an improved power consumption and/or processing
10 power consumption of the whole digital broadcast receiver like it is performed
within the channel decoder according to the present invention.

Fig. 1 shows that the lock detected output signal is also supplied to an enable
input of the baseband physical interface 10 that is arranged succeeding the
15 channel decoder according to the present invention. Therefore, also this base-
band physical interface 10 gets switched-on if lock has been achieved and
switched-off in unlocked state. Furtheron, also the controller 9 receives the
lock detected output signal via the output port 4 so that all processing stages
within the receiver that are connected to the controller 9 might be included in
20 the dynamic assignment of processing power. In the shown example the base-
band conversion circuit 8 receives a control signal from the controller 9 and
therefore a loop which is build by the baseband filtering & clock/carrier recov-
ery circuit 2, the controller 9 and the baseband conversion circuit 8 to prop-
erly adjust the baseband conversion can e. g. be switched in view of its band-
25 width and/or adjusting strategies.

Fig. 2 shows that a "digital demodulator" which comprises a baseband conver-
sion stage 8, a baseband filtering & clock/carrier recovery circuit 2 and a Vit-
erbi-Decoder 5 in case of satellite reception, as shown in Figs. 1, 3 and 2a,
30 comprises a baseband conversion stage 8b, a baseband filtering & clock/car-
rier circuit 8b and an adaptive equalizer 5b in case of cable reception as it is
shown in Fig. 2b and that it comprises a baseband conversion stage 8c, a
COFDM demodulator & clock/carrier recovery circuit 2c and a Viterbi-decoder
5c in case of terrestrial reception as it is shown in Fig. 2c. The COFDM de-
35 modulator performs an IFFT, i. e. an inverse fast Fourier transformation.

In the shown examples the processing stages corresponding to those shown
and described in connection with Fig. 1 get switched in the same or an equal

MÜLLER & HOFFMANN

- 7 -

Sony International (Europe) GmbH

51.716

14.06.1999

1 manner on basis of the lock detected output signal supplied by the sync-byte-detector.

5 The adaptive equalizer 5b shown in Fig. 2b also receives the lock detected output signal to change its adaptation strategy dependet therefrom from an acquisition mode to a tracking mode in case of lock-in of the receiver and vice-versa in case the receiver is not locked-in. Of course, this changing of the adaptation strategy is not limited to adaptive equalizers within channel decoders used in case of cable reception.

10

The channel decoder of the typical digital audio receiver locks basically as the one shown in Figs. 1 and 3 in connection with the "digital demodulator" shown in Fig. 2c and can of course also be replaced by a channel decoder according to the present invention which uses a lock detected signal output by its synchronization-byte-detector to dynamically assign processing power to different processing units within the channel decoder and/or also the rest of the digital audio broadcast receiver.

15

From the above description it is clear that the invention is not limited to just disable/enable the error correction, to switch the loop bandwidth of the clock and carrier recovery loop and/or to switch the clock carrier phase detectors to implementations that work only in locked mode, but in this case better than the robust implementations used for acquisition, but that the present invention discloses the use of the packet synchronization status, namely a lock detected signal supplied by the synchronization byte detector 1 to assign the amount of processing power within a digital broadcast receiver.

20

25

30

35

This Page Blank (uspto)

MÜLLER & HOFFMANN

- 8 -

Sony International (Europe) GmbH

File: 51.716

EPO - Munich
52

Claims

14. Juni 1999

- 1 1. Channel decoder for a digital broadcast receiver, comprising a synchro-
nization byte detector (1), **characterized in that** said synchronization byte de-
tector (1) provides a lock detected output signal indicating the lock-in of the
receiver to one broadcast channel which is used as a feed forward and/or feed-
5 back signal to respectively switch processing stages succeeding and/or preced-
ing said synchronization byte detector (1) into a different mode dependent on
whether or not lock has been achieved.
2. Channel decoder according to claim 1, **characterized in that** a clock
10 and/or carrier recovery circuit (2) preceding the synchronization byte detector
(1) gets switched from a robust mode used for acquisition of a broadcast chan-
nel to a locked mode used in case only small deviations of an acquired
broadcast channel need to be compensated in case of lock-in of the receiver and
vice-versa in case the receiver is not locked-in.
- 15 3. Channel decoder according to claim 1 or 2, **characterized in that** the
loop bandwidth of a clock and/or carrier recovery loop within the clock and/or
carrier recovery circuit (2) gets switched from a wide bandwidth mode that al-
lows the fast coarse lock of the receiver to the clock and/or carrier of a trans-
20 mission signal to a narrow bandwidth mode which performs a low noise fine
adjustment of the receiver to the clock and/or carrier of the transmission sig-
nal in case of lock-in of the receiver and vice-versa in case the receiver is not
locked-in.
- 25 4. Channel decoder according to anyone of the preceding claims, **charac-
terized in that** an adaptive equalizer (5b) within the channel decoder gets
switched from an aquisition mode to a tracking mode in case of lock-in of the
receiver and vice-versa in case the receiver is not locked-in.
- 30 5. Channel decoder according to anyone of the preceding claims, **charac-
terized in that** a forward error correction stage (3, 6, 7) succeeding the syn-
chronization byte detector (1) is switched from an off mode to on mode in case
of lock-in of the receiver and vice-versa in case the receiver is not locked-in.

MÜLLER & HOFFMANN

- 9 -

Sony International (Europe) GmbH

File: 51.716

1 6. Channel decoder according to claim 5, **characterized in that** all stages succeeding the forward error correction stage (3, 6, 7) are switched from an off mode to on mode in case of lock-in of the receiver and vice-versa in case the receiver is not locked-in.

5

7. Channel decoder according to anyone of the preceding claims, **characterized by** an output port (4) to output said lock detected output signal to other processing stages within the receiver.

10 8. Channel decoder according to anyone of the preceding claims, **characterized in that** it is used in a DVB or a DAB receiver.

9. Channel decoder according to anyone of the preceding claims, **characterized in that** it is used for satellite, cable or terrestrial reception.

15

20

25

30

35

MÜLLER & HOFFMANN

- 10 -

Sony International (Europe) GmbH

File: 51.716

AbstractEPO-Munich
52**"Channel Decoder for a Digital Broadcast Receiver"**

14. Juni 1999

A channel decoder for a digital broadcast receiver according to the present invention enables the use of the packet synchronization status available within such a channel decoder, i. e. within the synchronization byte detector (1) included therein, for other than synchronization purposes. Generally, the present invention discloses the use of the packet synchronization status, namely a lock detected output signal supplied by the synchronization byte detector (1) to assign the amount of processing power within the channel decoder and/or the whole digital broadcast receiver. In particular the disabling/enabling of the error correction (3) and/or all processing stages following within the channel decoder and/or the whole receiver, the switching of the loop bandwidth of the clock and carrier recovery loop (2) and/or the switching of the clock/carrier phase detectors (2) to implementations that work only in locked mode, but in this case better than the robust implementations used for acquisition is disclosed as well as the supply of the lock detected output signal.

(Fig. 1)

This Page Blank (uspto)

EPO - Munich
52

14. Juni 1999

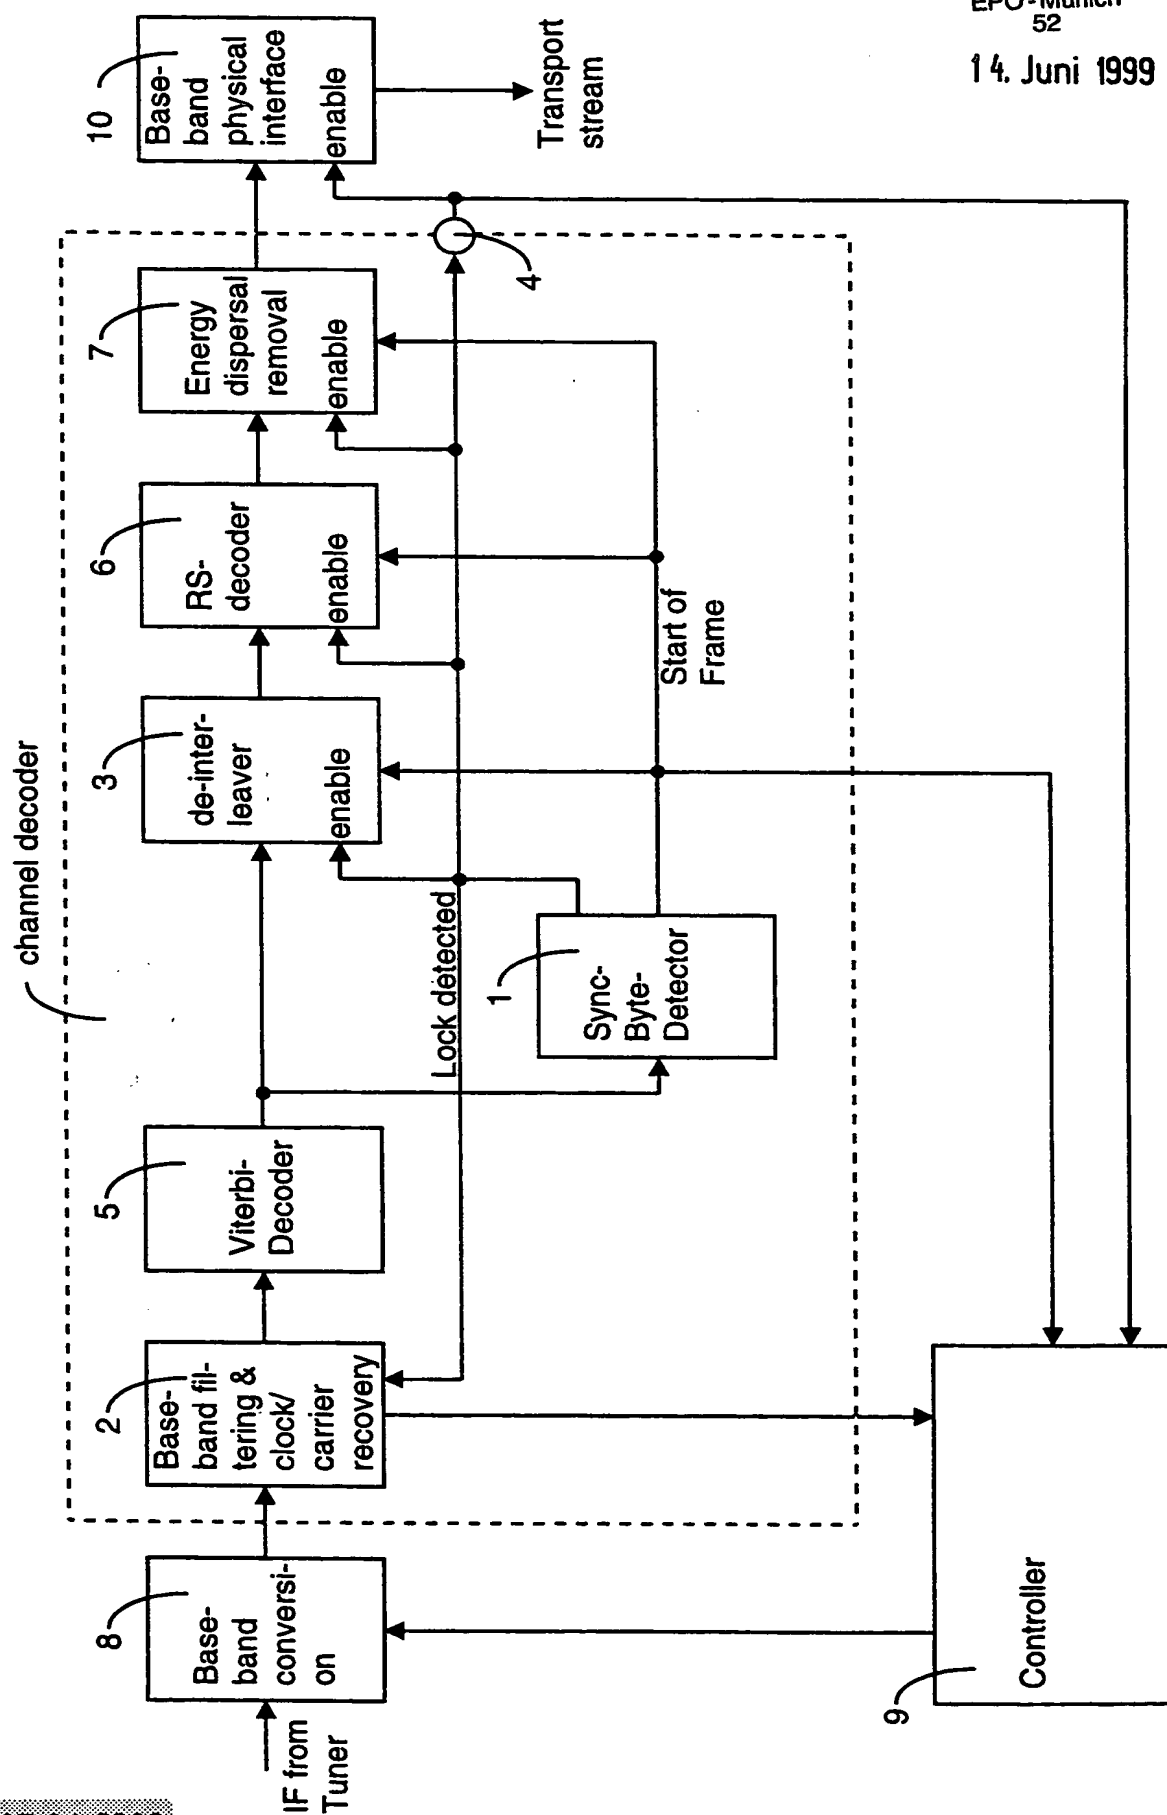


Fig. 1

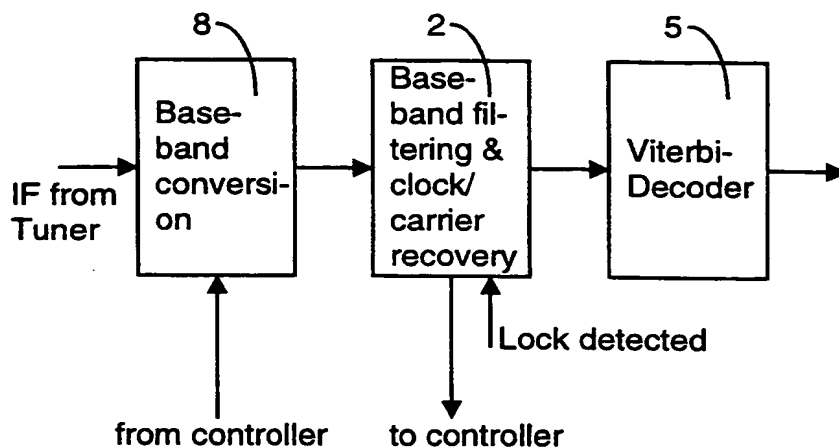


Fig. 2a

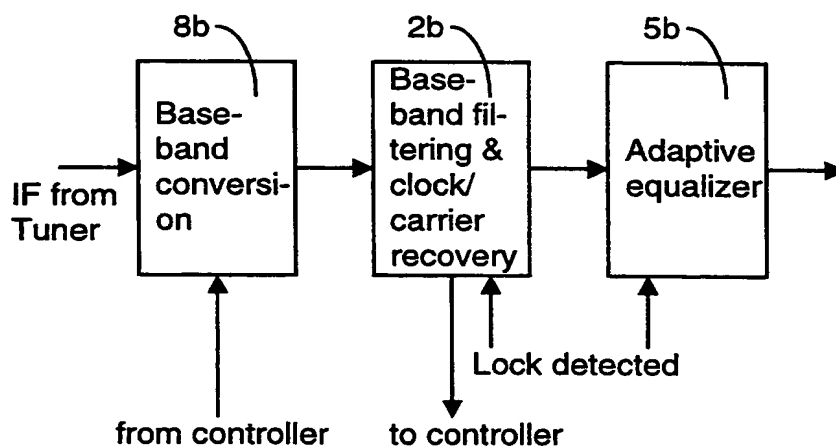


Fig. 2b

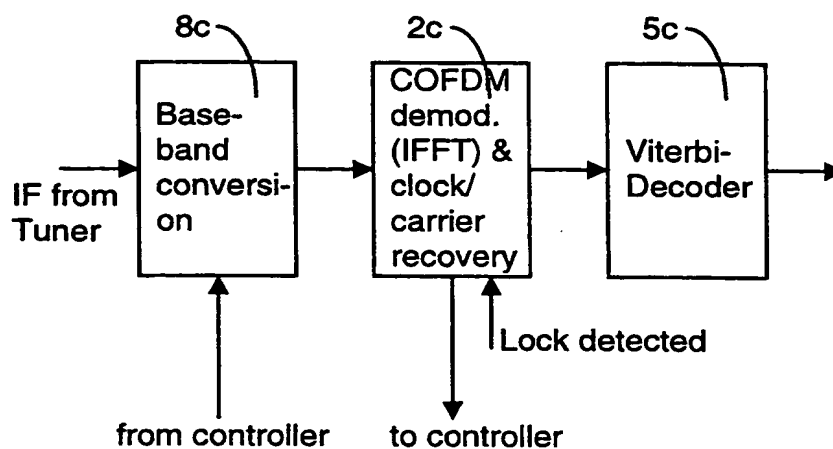


Fig. 2c

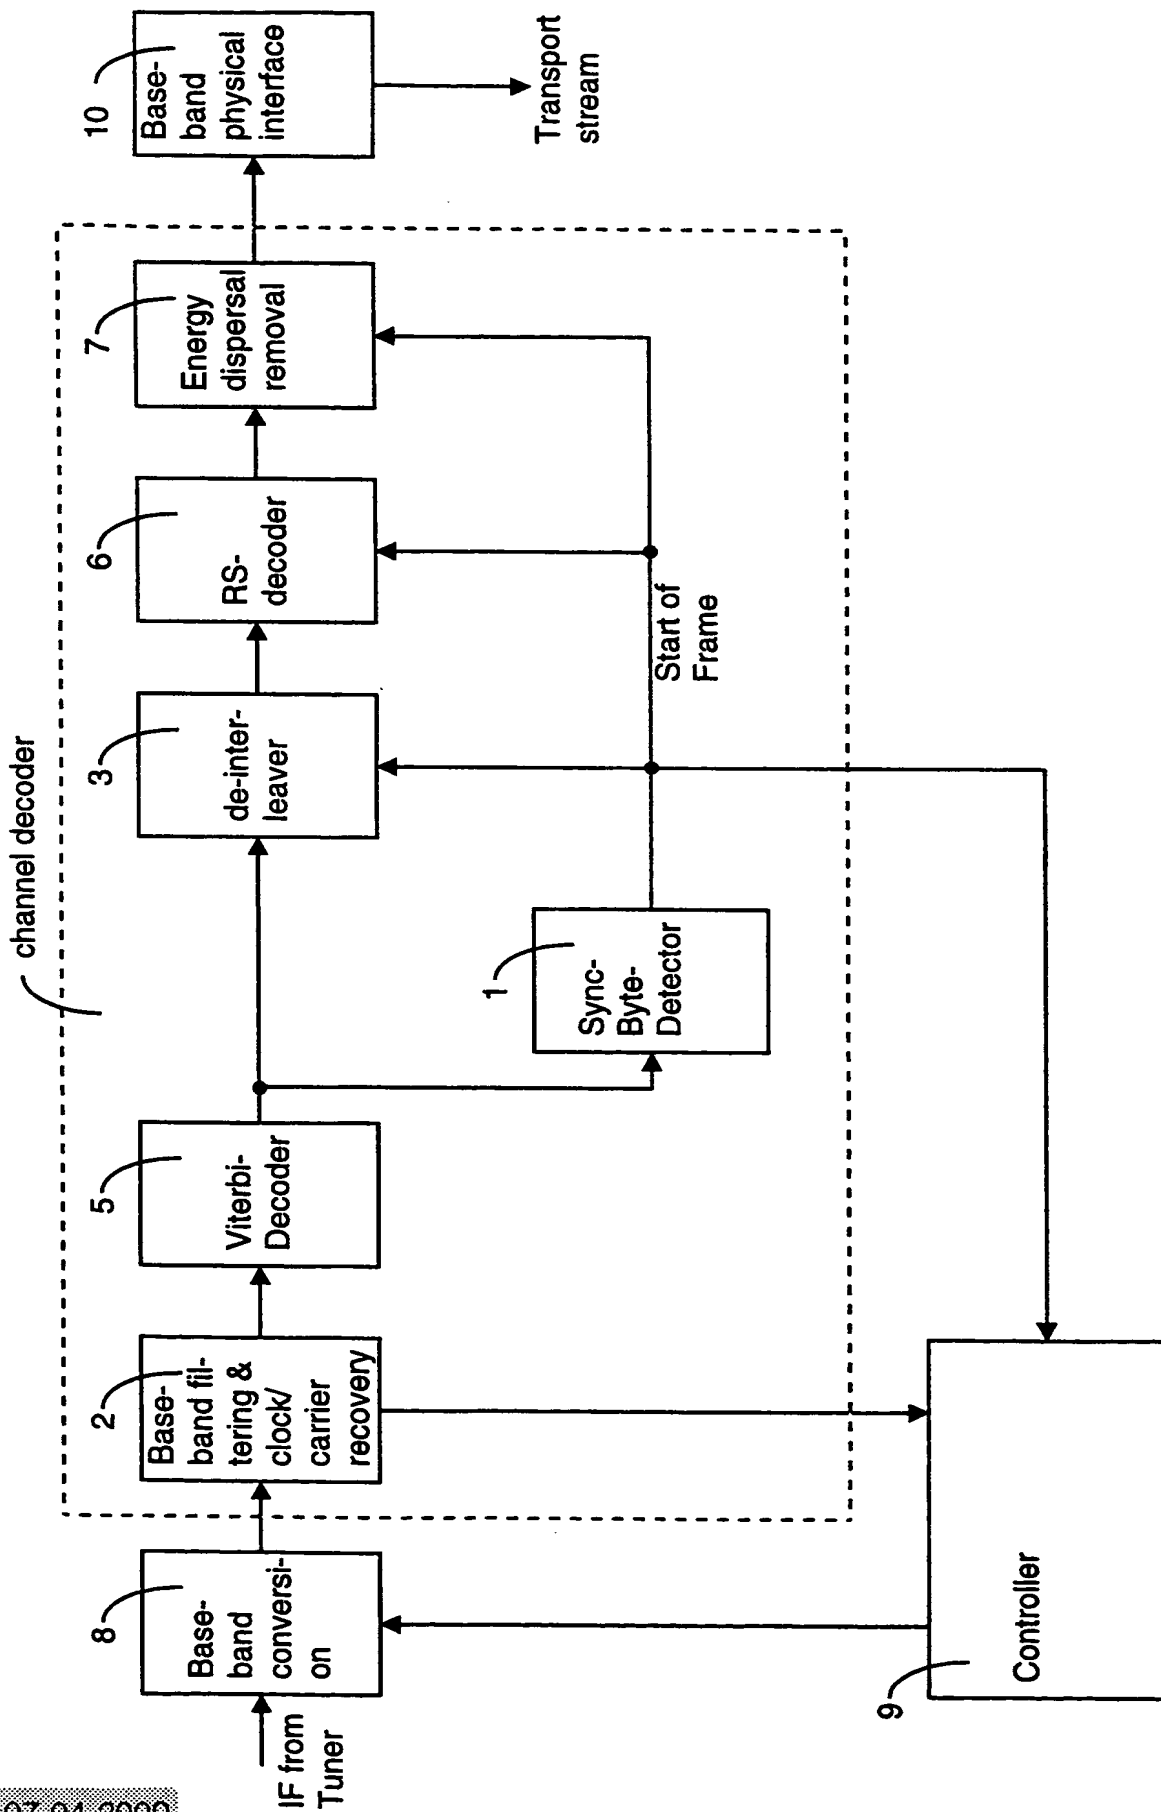


Fig. 3

This Page Blank (uspto)